




- |   |  |
|---|--|
| <p><b>(51) International Patent Classification<sup>7</sup>:</b> <b>B62B 15/00</b></p> <p><b>(21) International Application Number:</b><br/>PCT/FI2004/000471</p> <p><b>(22) International Filing Date:</b> 6 August 2004 (06.08.2004)</p> <p><b>(25) Filing Language:</b> Finnish</p> <p><b>(26) Publication Language:</b> English</p> <p><b>(30) Priority Data:</b><br/>U20030285 6 August 2003 (06.08.2003) FI</p> <p><b>(71) Applicant (for all designated States except US):</b> T:MI PEKAN MONIPALVELU [FI/FI]; -, Rytkyntie 1315, FIN-74680 Myllyniemi (FI).</p> <p><b>(72) Inventor; and</b></p> <p><b>(75) Inventor/Applicant (for US only):</b> MEHTONEN, Pekka [FI/FI]; -, Rytkyntie 1315, FIN-74680 Myllyniemi (FI).</p> | <p><b>(74) Agent:</b> LAURINOLLI, Tapio; Patenttitoimisto Tapio Laurinolli, P.O.Box 258, FIN-90101 Oulu (FI).</p> <p><b>(81) Designated States (unless otherwise indicated, for every kind of national protection available):</b> AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.</p> <p><b>(84) Designated States (unless otherwise indicated, for every kind of regional protection available):</b> ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,</p> |
|---|--|

*[Continued on next page]*

- (54) Title: MULTIPURPOSE SLED**

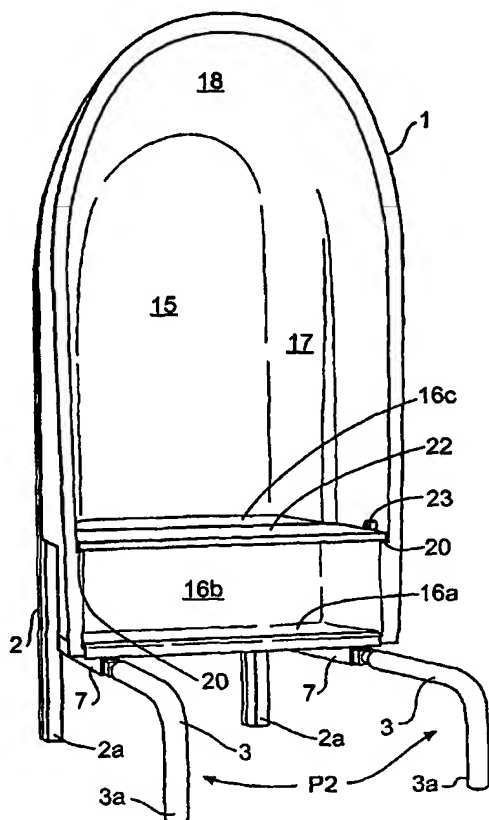

**(57) Abstract:** A multipurpose sled which comprises an upwards open container(1), which includes a bottom (15), a rear wall (16a, 16b, 16c), side walls (17) and a front wall (18), runners (2) which extend backwards over the container, and supporting means extending essentially as long as the runners for setting the sled on the back ends of the runners and the supporting means for using the sled as a shelter, is characterised in that it comprises handles (3) and means (7) for attaching the handles detachably to the rear part of the container in different positions for different purposes of use so that in a first position (P2) the handles (3, 3a) form said supporting means for setting the sled on the back ends (2a) of the runners and the supporting means for using the sled as a shelter.

***For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.***

ning of each regular issue of the PCT Gazette.

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments